



## WHY CHOOSE QUALITY STEEL ABOVE GROUND TANKS?

- 120 - 1,990 WG CAPACITY
- General Specifications
  - RegO® Valves
  - Made in the USA
  - Tanks accompanied by a 5 year warranty
  - Standard colors are available: White, Aluminum and Tan
  - Conforms to the latest edition of ASME Rules for Construction of Pressure Vessels, Section VIII, Division 1.
  - Complies with NFPA 58
  - Rated at 250 psig from -20° F to 125° F. All vessels registered with National Board. All standard vessels UL listed (UL 644 - Container Assemblies for LP-Gas). Standard vessels available with CRN (Canadian Registration Number)
  - Vessels are either powder coated with TGIC polyester or primed with liquid epoxy and coated with liquid urethane top coat
  - All vessels are shipped vacuum pre-purged to enable simplified first fill of the vessel.
- Family & employee owned
- Financing and leasing available
- Customized delivery programs available



*We want to make it easier for you to do your tank business!*

## HOW DO I FIND MY SALES REP?

Visit our website, [www.propanetank.com](http://www.propanetank.com) to view a list of our reps. Once on our site you'll be able to choose the Commercial options and from there you'll be taken to a list of US states where you can choose your location and view the contact information for your local sales rep. If you don't see your sales rep. please give us a call at 800-345-2495.

Our manufacturing locations are strategically located to help serve your tank needs.

**OHIO LOCATION**  
721 Graham Drive  
Fremont, OH 43420  
419-334-2664




**UTAH LOCATION**  
5601 Axel Park Rd.  
West Jordan, UT 84081  
801-280-1133

**HOME OFFICE**  
2914 U.S. 61  
Cleveland, MS 38732  
800-345-2495



# ABOVEGROUND TANKS (AG)

Consult our dimension and specification chart below to find the tank that best fits your needs. Visit our website at, [www.propanetank.com](http://www.propanetank.com) for more information.

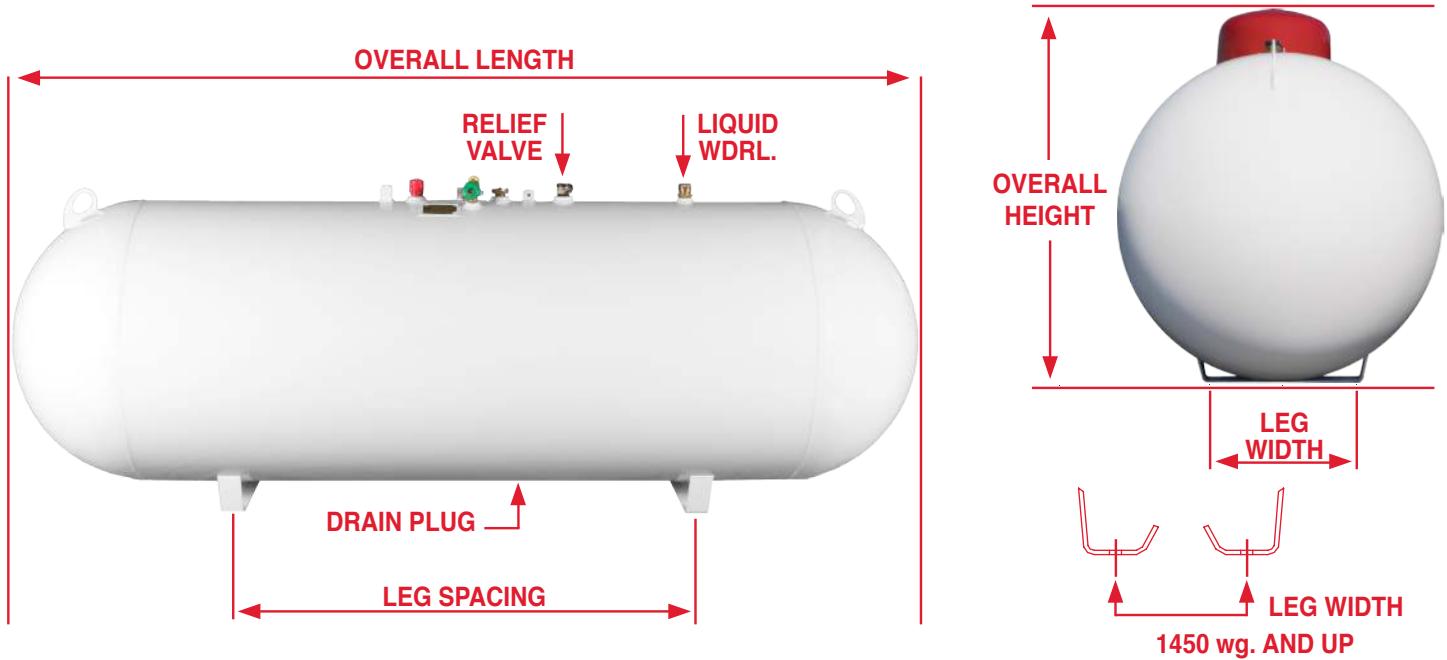

## APPROXIMATE ABOVEGROUND VESSEL DIMENSIONS AND SPECIFICATIONS

WATER CAPACITY	DIAMETER (OD)	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT	LEG** WIDTH	LEG** SPACING	WEIGHT (lbs.)	***QUANTITY	
								FULL LOAD	PER STACK
*120 wg.	24"	Ellip.	5'-8"	2'-10"	1'-1 1/2"	2'-10 1/2" or 3'-11"	260	108   112	16   14
*250 wg.	30"	Hemi.	7'-10"	3'-6"	1'-5"	4'-11"	480	54	9
*320 wg.	30"	Hemi.	9'-7"	3'-6"	1'-5"	5'	620	45	9
500 wg.	37 1/2"	Hemi.	10'	4'	1'-8"	5'	950	37   30	8   6
1000 wg.	41"	Hemi.	16'	4'-3"	1'-8"	10'-1"	1,800	15	5
1450 wg.	46 1/2"	Ellip.	17'-4"	4'-9"	1'-9"	11'-7"	2,650	12	4
1990 wg.	46 1/2"	Ellip.	23'-11"	4'-9"	1'-9"	16'	3,520	8	4

Dimensions and specifications shown are approximate. Individual vessels may vary.

\* Drain plug may not be available in this size. By special request only.

\*\* Leg spacing +/- 2". Leg widths and spacing may vary based on mfg. location. Check with your salesperson for details. 120, 250, 320 wg. Standard tanks - no holes in legs (one center hole on request). 500 and 1000 wg. standard tanks - 2 - 3/4" holes, 16" on center each leg. 1450 wg. and up as shown above.

\*\*\* Full load and stack quantities vary by shipping location. Check with your salesperson for details.



**HOME OFFICE**  
2914 U.S.61  
Cleveland, MS 38732  
800-345-2495

**OHIO LOCATION**  
721 Graham Drive  
Fremont, OH 43420  
419-334-2664

**UTAH LOCATION**  
5601 Axel Park Rd.  
West Jordan, UT 84081  
801-280-1133