



WHY CHOOSE QUALITY STEEL UNDERGROUND TANKS?

- 120 - 1,990 WG CAPACITY
- General Specifications
 - Conforms to the latest edition of ASME Rules for Construction of Pressure Vessels, Section VIII, Division 1.
 - Complies with NFPA 58.
 - Rated at 250 psig from -20° F to 125° F. All vessels registered with National Board.
 - Two service options available:
 - Option 1: Ready-to-bury underground option, coated with either powder coated phenolic epoxy finish or liquid applied epoxy primer coat followed by urethane top coat, supplied with composite AG/UG dome
 - Option 2: Aboveground option, coated with either powder coated TGIC polyester finish or liquid applied epoxy primer coat followed by urethane top coat, supplied with steel AG/UG dome
- Family & employee owned
- Financing and leasing available
- Customized delivery programs available



We want to make it easier for you to do your tank business!

HOW DO I FIND MY SALES REP?

Visit our website, www.propanetank.com to view a list of our reps. Once on our site you'll be able to choose the Commercial options and from there you'll be taken to a list of US states where you can choose your location and view the contact information for your local sales rep. If you don't see your sales rep. please give us a call at 800-345-2495.

Our manufacturing locations are strategically located to help serve your tank needs.

OHIO LOCATION
721 Graham Drive
Fremont, OH 43420
419-334-2664




UTAH LOCATION
5601 Axel Park Rd.
West Jordan, UT 84081
801-280-1133

HOME OFFICE
2914 U.S. 61
Cleveland, MS 38732
800-345-2495



UNDERGROUND/ABOVEGROUND TANKS (AG/UG)

Consult our dimension and specification chart below to find the tank that best fits your needs. Visit our website at www.propanetank.com for more information.

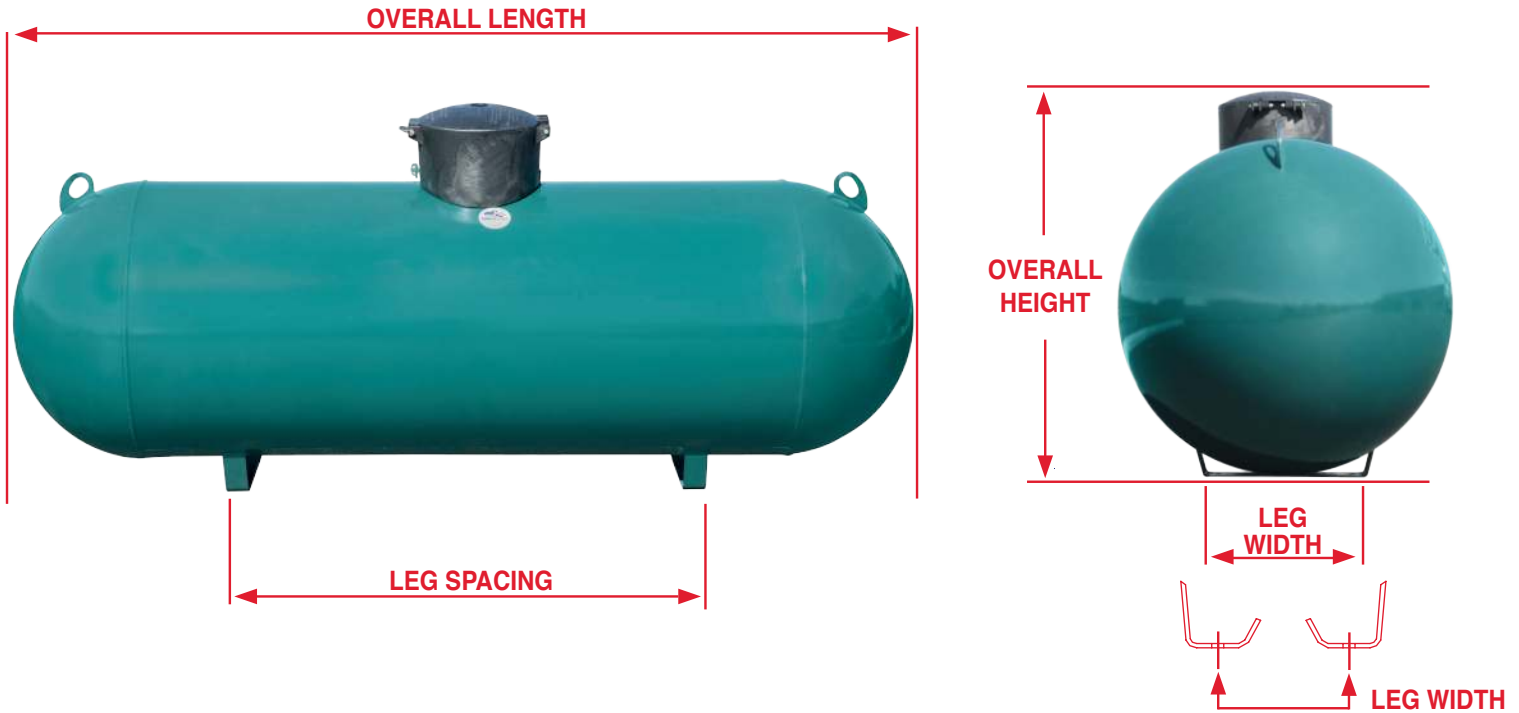

APPROXIMATE ABOVEGROUND/UNDERGROUND (AG/UG) VESSEL DIMENSIONS AND SPECIFICATIONS

WATER CAPACITY	DIAMETER (OD)	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT	LEG* WIDTH	LEG** SPACING	WEIGHT (lbs.)	**QUANTITY	
								FULL LOAD	PER STACK
*120 wg.	24"	Ellip.	5'-8"	3'	1'-1 1/2"	2'-10 1/2" or 3'-11"	260	108 96	16 12
*250 wg.	30"	Hemi.	7'-10"	3'-8"	1'-5"	4'-11"	480	54	9
*320 wg.	30"	Hemi.	9'-7"	3'-8"	1'-5"	5'	620	45	9
500 wg.	37 1/2"	Hemi.	10'	4'-2"	1'-8"	5'	950	37 30	8 6
1000 wg.	41"	Hemi.	16'	4'-5"	1'-8"	10'-1"	1,800	17 15	6 5
1450 wg.	46 1/2"	Ellip.	17'-4"	4'-11"	1'-9"	11'-7"	2,650	12	4
1990 wg.	46 1/2"	Ellip.	23'-11"	4'-11"	1'-9"	16'	3,520	8	4

Dimensions and specifications shown are approximate. Individual vessels may vary

* Leg spacing +/- 2". Leg widths and spacing may vary based on mfg. location. Check with your salesperson for details. 120, 250, 320 wg. standard tanks - no holes in legs (one center hole on request). 500 and 1000 wg. standard tanks - 2 holes 16" on center. 1450 wg. and up as shown above.

** Full load and stack quantities vary by shipping location. Check with your salesperson for details.



HOME OFFICE
2914 U.S.61
Cleveland, MS 38732
800-345-2495

OHIO LOCATION
721 Graham Drive
Fremont, OH 43420
419-334-2664

UTAH LOCATION
5601 Axel Park Rd.
West Jordan, UT 84081
801-280-1133