





WHY CHOOSE QUALITY STEEL ANHYDROUS AMMONIA (NH3) TANKS?

- 1,000 2,000 WG CAPACITY
- General Specifications
 - All tanks are made in America at the Fremont, Ohio, plant and shipped direct from that location
 - Stringently manufactured to the requirements of the ASME code for your safety
 - Engineered roll-over cage with heavier steel and greater accessibility to valves
 - Roll-over cage mounted on welding pads for maximum strength and is field repairable
 - 30% more working clearance from liquid withdrawal valve and safety handle
 - Seal welded stainless steel data plate mounted on pads and away from hose connections for longer life
 - Superior leg design that is stronger, field repairable, mounted on a welding pad
 - Precise fit before weld with 100% x-ray of long-seam welds
 - Advanced powder paint coating to resist exterior corrosion
 - All tanks are fully stress relieved to help alleviate stress corrosion
 - · All tanks are vacuum purged
 - Standard tanks are shipped with stainless steel float gauges, water bottle attachments and two drain plugs
 - A three-year limited warranty is in place along with largest, most experienced sales and customer support team
- Financing and leasing available
- Customized delivery programs available

HOW DO I FIND MY SALES REP?

Visit our website, **www.propanetank.com** to view a list of our reps. Once on our site you'll be able to choose the Commercial options and from there you'll be taken to a list of US states where you can choose your location and view the contact information for your local sales rep. If you don't see your sales rep. please give us a call at 800-345-2495.

Our manufacturing locations are strategically located to help serve your tank needs.

OHIO LOCATION 721 Graham Drive Fremont, OH 43420 419-334-2664 419-334-2664 UTAH LOCATION 5601 Axel Park Rd. West Jordan, UT 84081 801-280-1133 HOME OFFICE 2914 U.S. 61 Cleveland, MS 38732 800-345-2495



We want to make it easier for you to do your tank business!



ANHYDROUS AMMONIA (NH3)

Consult our dimension and specification chart below to find the tank that best fits your needs. Capacity Visit our website at www.propanetank.com for more information.

QUALITY STEEL

QUALITY STEEL

(gallons)


Diameter (OD)

Head Type

Overall Length

Vessels shown with optional safety equipment brackets and end mount float gauge.

Water bottle and safety equipment by customer.



Quality Steel Corporation M13 Nurse Hamks 16'


| | | 100 | | | | | | |
|---|-------------------------------------|--------------------------|---------------------|-----------------------------|-----------------------------|--|---------------------------------|---------------------|
| | Capacity | Diameter | Head | Overall | Overall | Leg Bolt | Spacing | Weight |
| c | _p (gallons) _a | net (OD) He | d Typever | ျ၊ Length _{ral} | Heigþt _{Bo} | t shength | _W Wighth | (lbs.) |
| Ĭ | 1000 | DD) Ty 41" -1" Hei | Hemi. | | • | Width " 9' o.c. 10'' ø.€. E | (lbs.) 21" o.c. 112800.c. | 17 ^{1,800} |
| | 1450 1450 40 | .46.5" 5.5" Elli | Ellip, p. 17'-33 | /17'-3 3/4" /4" | 5'-4" 10' o.c. 12'-1" | 10' o.c. 21" o.c. 12'-1" 21" o.c. | 21" o.c. 2,658 21" o.c. | 2,658 |
| | 200 2 000 4 | 5.5"46.5" Elli | p. Ellip24'-1 | 2000 " 24'- <u>1"</u> 4" | 46.5 5'- 4 4' | " E 211'46.c. | Illip. 2175ē.c. | 24'-1' 3,765 |
| | | | | | | | | |

Dimensions and specifications shown are approximate. Individual vessels may vary

General Specifications General Specifications


General Specifica

Standard Fitting Arrangement Stand**Stafitdar dr Fitting Arrangement Standard Fitting Arrangement**



- 1. 1 1/2" liquid withdrawal
- 2. Pressure gauge
- 3. Vapor/Fill
- 4. Float gauge

- 5. Fixed outage gauge
- 6. Tank name plate
- 7. Roll cage/valve guard

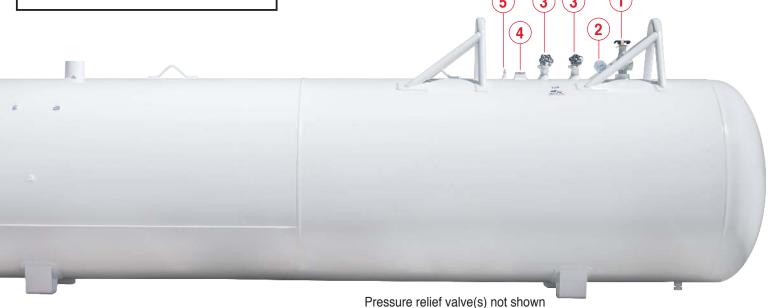



HOME OFFICE

2914 U.S.61 Cleveland, MS 38732 800-345-2495

OHIO LOCATION

721 Graham Drive Fremont, OH 43420 419-334-2664

UTAH LOCATION

5601 Axel Park Rd. West Jordan, UT 84081 801-280-1133