



Aboveground Tanks



WHY CHOOSE QUALITY STEEL ABOVEGROUND TANKS?

- 120 - 1,990 WG CAPACITY
- General Specifications
 - RegO® Valves
 - Made in the USA
 - Tanks accompanied by a 5 year warranty
 - Standard colors are available: White, Aluminum and Tan
 - Conforms to the latest edition of ASME Rules for Construction of Pressure Vessels, Section VIII, Division 1.
 - Complies with NFPA 58
 - Rated at 250 psig from -20° F to 125° F. All vessels registered with National Board. All standard vessels UL listed (UL 644 - Container Assemblies for LP-Gas). Standard vessels available with CRN (Canadian Registration Number)
 - Vessels are either powder coated with TGIC polyester or primed with liquid epoxy and coated with liquid urethane top coat
 - All vessels are shipped vacuum pre-purged to enable simplified first fill of the vessel.
- Family & employee owned
- Financing and leasing available
- Customized delivery programs available

HOW DO I FIND MY SALES REP?


Visit our website, www.propanetank.com to view a list of our reps. Once on our site you'll be able to choose the Commercial options and from there you'll be taken to a list of US states where you can choose your location and view the contact information for your local sales rep. If you don't see your sales rep. please give us a call at 800-345-2495.

Our manufacturing locations are strategically located to help serve your tank needs.



Proudly Made in the U.S.A.

Consult our dimension and specification chart below to find the tank that best fits your needs. Visit our website at, www.propanetank.com for more information.

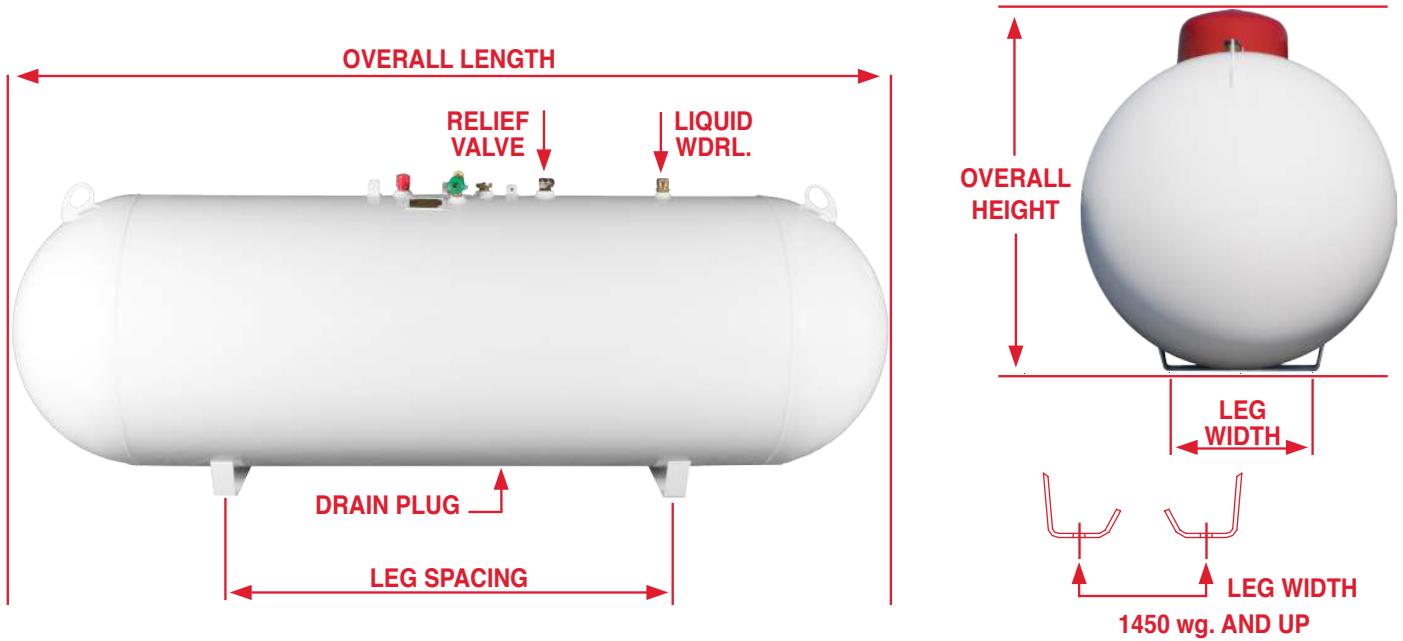

APPROXIMATE ABOVEGROUND VESSEL DIMENSIONS AND SPECIFICATIONS

WATER CAPACITY	DIAMETER (OD)	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT	LEG** WIDTH	LEG** SPACING	WEIGHT (lbs.)	***QUANTITY	
								FULL LOAD	PER STACK
*120 wg.	24"	Ellip.	5'-8"	2'-10"	1'-1 1/2"	2'-10 1/2" or 3'-11"	260	108 112	16 14
*250 wg.	30"	Hemi.	7'-10"	3'-6"	1'-5"	4'-11"	480	54	9
*320 wg.	30"	Hemi.	9'-7"	3'-6"	1'-5"	5'	620	45	9
500 wg.	37 1/2"	Hemi.	10'	4'	1'-8"	5'	950	37 30	8 6
1000 wg.	41"	Hemi.	16'	4'-3"	1'-8"	10'-1"	1,800	15	5
1450 wg.	46 1/2"	Ellip.	17'-4"	4'-9"	1'-9"	11'-7"	2,650	12	4
1990 wg.	46 1/2"	Ellip.	23'-11"	4'-9"	1'-9"	16'	3,520	8	4

Dimensions and specifications shown are approximate. Individual vessels may vary.

* Drain plug may not be available in this size. By special request only.

** Leg spacing +/- 2". Leg widths and spacing may vary based on mfg. location. Check with your salesperson for details. 120, 250, 320 wg. Standard tanks - no holes in legs (one center hole on request). 500 and 1000 wg. standard tanks - 2 - 3/4" holes, 16" on center each leg. 1450 wg. and up as shown above.

*** Full load and stack quantities vary by shipping location. Check with your salesperson for details.