



# Dispenser Tanks



## WHY CHOOSE QUALITY STEEL DISPENSER TANKS?

- 500- 1,990 WG CAPACITY
- General Specifications
  - Made in the USA
  - Aboveground tanks accompanied by a 5 year warranty
  - Standard color is : White
  - Conforms to the latest edition of ASME Rules for Construction of Pressure Vessels, Section VIII, Division 1.
  - Complies with NFPA 58
  - Rated at 250 psig from -20° F to 125° F. All vessels registered with National Board. All standard vessels UL listed (UL 644 - Container Assemblies for LP-Gas).
  - Vessels are either powder coated with TGIC polyester or primed with liquid epoxy and coated with liquid urethane top coat
  - Superior leg design with heavy steel re-enforcing
  - Welded steel valve guard
  - RegO® Valves
  - All vessels are shipped vacuum pre-purged
  - Underground tanks available upon special request
- Family & employee owned
- Financing and leasing available
- Customized delivery programs available
- Largest and most experienced sales support team in the industry



## HOW DO I FIND MY SALES REP?

Visit our website, [www.QualitySteelCorporation.com](http://www.QualitySteelCorporation.com) to view a list of our reps. Once on our site you'll be able to choose the Commercial options and from there you'll be taken to a list of US states where you can choose your location and view the contact information for your local sales rep. If you don't see your sales rep. please give us a call at 800-345-2495.

Our manufacturing locations are strategically located to help serve your tank needs.

**OHIO LOCATION**  
721 Graham Drive  
Fremont, OH 43420  
419-334-2664




**UTAH LOCATION**  
5601 Axel Park Rd.  
West Jordan, UT 84081  
801-280-1133

**HOME OFFICE**  
2914 U.S. 61  
Cleveland, MS 38732  
800-345-2495



**Proudly Made in the U.S.A.**

Consult our dimension and specification chart below to find the tank that best fits your needs. Visit our website at [www.QualitySteelCorporation.com](http://www.QualitySteelCorporation.com) for more information.

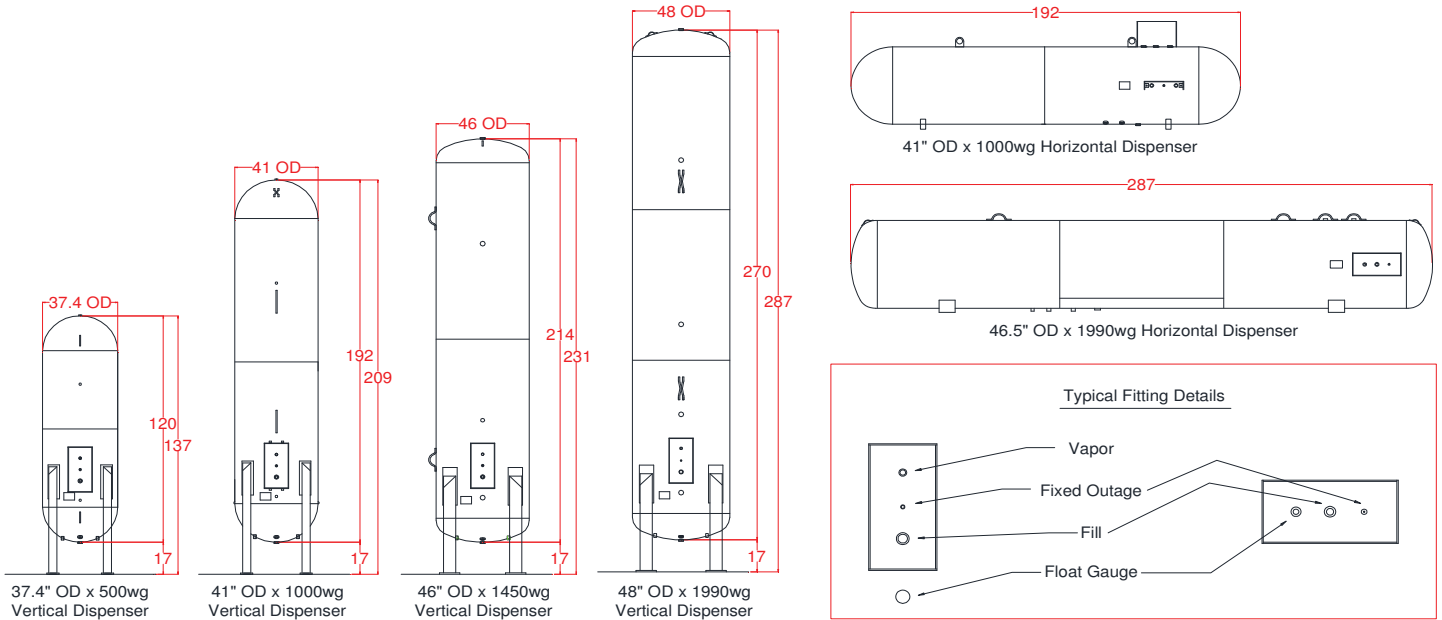

\*Other fitting/valve arrangements may be available on special request.

**APPROXIMATE DISPENSER DIMENSIONS AND SPECIFICATIONS**

Dispenser Type	Nom. Capacity (wg)	Diameter (OD)	Head Type	Vessel Length	Overall Height	Leg Bolt Spacing		Est. Vessel Weight (lbs.)
						Length	Width	
Vertical	500	37.4"	Hemi.	10'	11'-5"	2'-2 1/2"	2'-2 1/2"	950
	1000	41"	Hemi.	16'	17'-5"	2'-5 3/8"	2'-5 3/8"	2,330
	1450	46"	Ellip.	17'-10"	19'-3"	2'-8 1/2"	2'-8 1/2"	3,272
	1990	48"	Ellip.	22'-6"	23'-11"	2'-10"	2'-10"	5,336
Horizontal	1000	41"	Hemi.	10'	4'-10"	10'-1" 11'-9 1/2"	1'-4" 1'-4"	1,800
	1990	46.5"	Ellip.	23'-11"	4'-5"	16'	1'-4"	3,516

